


RK2550

**RACCORDO DI ESTREMITA' 90°
ORIENTABILE CON FILETTATURA
TERMINALE BSPP**

**90° ROTARY END UNIONS WITH
MALE BSPP CONNECTION**

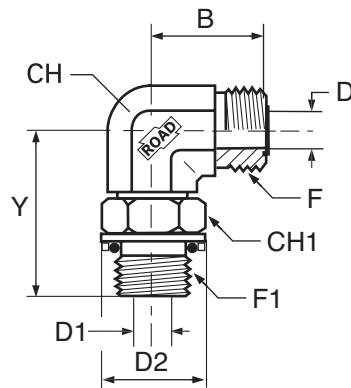


T	T	CODE	F	F1	B	Y	D	D1	CH	CH1	D2	Pressure	
Ø mm	Ø Poll.				mm	mm	mm	mm	mm	mm	mm	Wp	Max
06	1/4	RK2550-06-10	9/16-18	1/8	21.5	30.2	5	4.4	14	14	16	320	400
06	1/4	RK2550-06-13	9/16-18	1/4	23.5	33.5	5	7.5	14	19	19	320	400
06	1/4	RK2550-06-17	9/16-18	3/8	23.5	38	5	9.9	19	22	23	320	400
08	5/16	RK2550-08-13	11/16-16	1/4	25	35.5	6.5	7.5	19	19	19	320	400
08	5/16	RK2550-08-17	11/16-16	3/8	26.5	38	6.5	9.9	19	22	23	320	400
08	5/16	RK2550-08-21	11/16-16	1/2	29.2	48.6	6.5	12.3	27	27	28,5	320	400
10	3/8	RK2550-10-13	11/16-16	1/4	25	35.8	6.5	7.5	19	19	19	320	400
10	3/8	RK2550-10-17	11/16-16	3/8	26.5	38	6.5	9.9	19	22	23	320	400
10	3/8	RK2550-10-21	11/16-16	1/2	29.2	48.6	6.5	12.3	27	27	28,5	320	400
12	1/2	RK2550-12-13	13/16-16	1/4	28	35.5	9.5	7.5	19	19	19	320	400
12	1/2	RK2550-12-17	13/16-16	3/8	28	38	9.5	9.9	19	22	23	320	400
12	1/2	RK2550-12-21	13/16-16	1/2	30.8	48.6	9.5	12.3	27	27	28,5	320	400
12	1/2	RK2550-12-26	13/16-16	3/4	33.5	51.4	9.5	15.5	30	36	34,5	250	330
14		RK2550-14-17	1"-14	3/8	33.5	40.7	12.5	9.9	27	22	23	320	400
14		RK2550-14-21	1"-14	1/2	33.5	48.6	12.5	12.3	27	27	28,5	320	400
14		RK2550-14-26	1"-14	3/4	35.8	51.4	12.5	15.5	30	36	34,5	320	400
14		RK2550-14-33	1"-14	1	39.7	58.4	12.5	21.5	36	41	44,5	320	400
15		RK2550-15-17	1"-14	3/8	33.5	40.7	12.5	9.9	27	22	23	320	400
15		RK2550-15-21	1"-14	1/2	33.5	48.6	12.5	12.3	27	27	28,5	320	400
15		RK2550-15-26	1"-14	3/4	35.8	51.4	12.5	15.5	30	36	34,5	320	400
15		RK2550-15-33	1"-14	1	39.7	58.4	12.5	21.5	36	41	44,5	320	400
16	5/8	RK2550-16-17	1"-14	3/8	33.5	40.7	12.5	9.9	27	22	23	320	400
16	5/8	RK2550-16-21	1"-14	1/2	33.5	48.6	12.5	12.3	27	27	28,5	320	400
16	5/8	RK2550-16-26	1"-14	3/4	35.8	51.4	12.5	15.5	30	36	34,5	320	400
16	5/8	RK2550-16-33	1"-14	1	39.7	58.4	12.5	21.5	36	41	44,5	320	400



RK2550

RACCORDO DI ESTREMITA' 90°
ORIENTABILE CON FILETTATURA
TERMINALE BSPP

90° ROTARY END UNIONS WITH
MALE BSPP CONNECTION

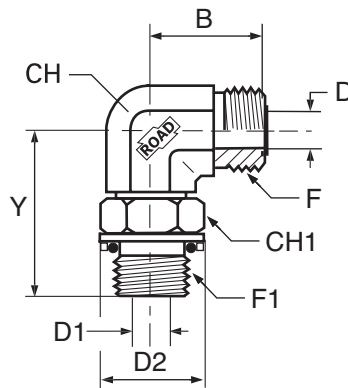

T	T	CODE	F	F1	B	Y	D	D1	CH	CH1	D2	Pressure	
Ø mm	Ø Poll.				mm	mm	mm	mm	mm	mm	mm	Wp	Max
18		RK2550-18-21	1-3/16-12	1/2	37.5	49.5	15.5	12.3	30	27	28,5	320	400
18		RK2550-18-26	1-3/16-12	3/4	37.5	51.4	15.5	15.5	30	36	34,5	250	330
18		RK2550-18-33	1-3/16-12	1	41.2	58.4	15.5	21.5	36	41	44,5	320	400
20	3/4	RK2550-20-21	1-3/16-12	1/2	37.5	49.5	15.5	12.3	30	27	28,5	320	400
20	3/4	RK2550-20-26	1-3/16-12	3/4	37.5	51.4	15.5	15.5	30	36	34,5	250	330
20	3/4	RK2550-20-33	1-3/16-12	1	41.2	58.4	15.5	21.5	36	41	44,5	320	400
22		RK2550-22-26	1-7/16-12	3/4	44.5	55.9	25	15.5	36	36	34,5	250	330
22		RK2550-22-33	1-7/16-12	1	41.5	58.4	20.5	21.5	36	41	44,5	250	330
22		RK2550-22-42	1-7/16-12	1-1/4	44.5	60.9	20.5	27.5	41	50	53	180	250
25	1"	RK2550-25-26	1-7/16-12	3/4	44.5	55.9	25	15.5	36	36	34,5	250	330
25	1"	RK2550-25-33	1-7/16-12	1	41.5	58.4	20.5	21.5	36	41	44,5	250	330
25	1"	RK2550-25-42	1-7/16-12	1-1/4	44.5	60.9	20.5	27.5	41	50	53	180	250
28		RK2550-28-33	1-3/16-12	1	44.5	60.9	26	21.5	41	41	44,5	250	400
28		RK2550-28-42	1-11/16	1-1/4	44.5	60.9	26	27.5	41	50	53	180	250
28		RK2550-28-48	1-11/16	1-1/2	49	64.7	26	33	48	55	58	180	250
30		RK2550-30-33	1-11/16	1	44.5	60.9	26	21.5	41	41	44,5	250	400
30		RK2550-30-42	1-11/16	1-1/4	44.5	60.9	26	27.5	41	50	53	180	250
30		RK2550-30-48	1-11/16	1-1/2	49	64.7	26	33	48	55	58	180	250
32	1"1/4	RK2550-32-33	1-11/16	1	44.5	60.9	26	21.5	41	41	44,5	250	400
32	1"1/4	RK2550-32-42	1-11/16	1-1/4	44.5	60.9	26	27.5	41	50	53	180	250
32	1"1/4	RK2550-32-48	1-11/16	1-1/2	49	64.7	26	33	48	55	58	180	250
35		RK2550-35-48	2"-12	1-1/2	49	64.7	32	33	48	55	58	180	250
38	1"1/2	RK2550-38-48	2"-12	1-1/2	49	64.7	32	33	48	55	58	180	250

